

65E / Motor Grader TURBO



82 kW
7,615 kg
3,050 or 3,660 mm BLADE

Pictured with optional equipment

Compact Grader With Big Grader Features

1,339 mm Circle With "A" Frame Drawbar
Full Power Shift Transmission With Torque Converter
Torque Proportioning Rear Differential

Built From A Lineage Of Market Leaders For Over 60 Years



65E / Motor Grader

TURBO



USA Heritage
Since 1949

BIG GRADER FEATURES IN A SMALL PACKAGE

Operating Weight

- Front 2,140 kg
- Rear 5,475 kg
- Total 7,615 kg

Engine

Cummins QSB4.5 Tier 3	Caterpillar C4.4 Tier 3
4 Cycle, turbo diesel	4 Cycle, turbo diesel
4 cylinder	4 cylinder
4.5 liters	4.4 liters
82 kW	85 kW
2,200 rpm	2,200 rpm

Brakes

- Service – 4 wheel, wet disc & self adjusting
- Independent tandem by tandem system
- Mechanical parking brake

Axles

- Front axle clearance – 516 mm
- Rear axle – torque proportioning differential

Transmission

- Full power shift with torque converter
- 6 speeds forward – top speed 38.4 km/h
- Electronic shift control
- LCD operations monitor
- Shift inhibit system

Circle

- 1,339 mm diameter gear driven circle
- Supported by "A" frame
- 4 guides with wear plates
- Shim adjustable
- 360° rotation
- Hydraulic circle side shift

Moldboard

- "Rollaway" blade with involute curve
- Replaceable cutting edges
- Size – 3,050 mm
- Interchangeable end bits



Full power shift transmission with torque converter



1,339 mm gear driven circle with "A" frame allows 360° blade rotation

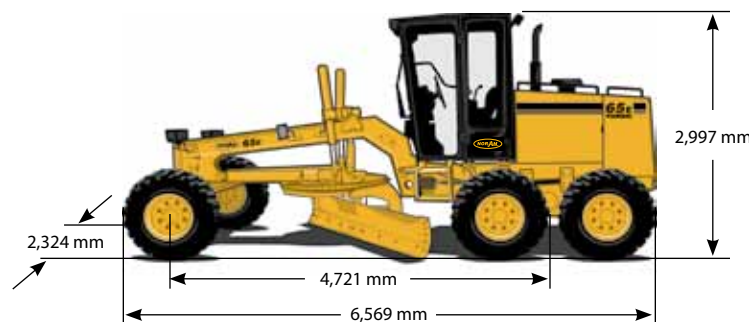


Illustration includes optional equipment

STANDARD EQUIPMENT

- Accelerator/decelerator and hand throttle
- Alternator – 100 Amp.
- Articulated frame
- Back-up alarm
- Batteries (2) – 12 volt
- Controls, hydraulic
 - Articulation
 - Circle side shift
 - Circle turn
 - Moldboard lift/lower
 - Moldboard side shift
 - Wheel lean
- Control console, adjustable
- Drawbar
- Engine side panels
- Gauges
 - Air cleaner service indicator
 - Engine coolant temperature
 - Engine oil pressure
 - Fuel level
 - Hourmeter
 - Tachometer
 - Transmission LCD message center
 - Transmission oil temperature
 - Voltmeter
- Horn, electric
- Hydraulic valve – 8 section
- Implement control lever lock
- Light package
 - Front headlights (2) – hi/lo beam
 - Front worklights (2)
 - Turn signals, stop and tail lights
- Master electrical switch
- Mechanical parking brake
- Muffler, horizontal under hood
- Moldboard – 3,050 mm wide
- Moldboard pitch, manual
- ROPS Canopy with
 - Dome light
 - Floormat
 - Glove box
 - Grab handles
 - Headliner
 - Inside mirror
 - Seat belt
- Seat, vinyl – deluxe air suspension
- Steps, right and left
- Tires – 381 x 495 mm (8PR) G2 tubeless
- Transport tie down group
- Vandalism protection

NorAm Construction Equipment
50 N. Brockway St., # 308
Palatine, IL 60067
847-934-6565
www.noram65.com



The information contained in this brochure is intended to be of general nature only. The manufacturer may at any time and from time to time, for technical or other necessary reasons, modify any of the details or specifications of the product described in this brochure. Illustrations do not necessarily show products in standard condition. The dimensions, weights and capacities shown herein, as well as any conversion data used, are approximate only and are subject to variations within normal manufacturing techniques. To be sure of getting accurate, detailed and up-to-date information, any intending buyer should contact NorAm.

OPTIONAL EQUIPMENT

- Cab, includes
 - Cloth seat – air suspension
 - Defroster fans (2)
 - F & R wipers/washers
 - Heater, 40,000 BTU
 - Inside mirror
 - Sliding rear window
 - Sound suppression
 - Tinted glass
- Cold weather starting aid (ether)
- Dozer – 2,438 x 610 mm, with skid plates
- Factory air conditioner
- Float control valves, (3)
- Floodlights, (2) F & (2) R
- Mirrors, rearview – external, (2)
- Moldboard – 3,660 mm wide
- Moldboard pitch, hydraulic
- Radio group
- Rear ripper – 1,905 mm wide, 3 shanks
- Scarifier – 794 mm wide, 9 teeth
- Strobe light
- 90° bank slope saddle



Deluxe cab



Rear ripper



Dozer blade



90° Bank slope saddle